Meet MarCELL®

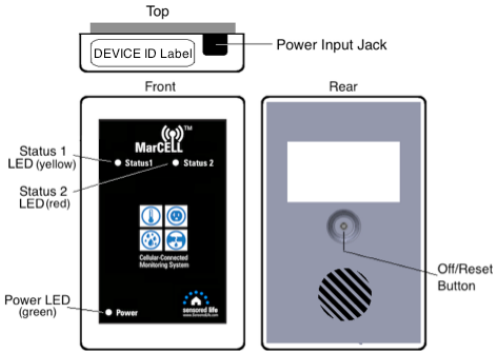

1 START HERE Register your MarCELL

- Go to www.sensoredlife.com
- Click on Create Account near top right of home page
- Follow instructions for setting up a new account
- Select "Add New Device"
- Enter Device ID (from label on top of unit), name & location
- Accept or change Temperature, Humidity ranges
- Set up notifications (What you want MarCELL to do when an alert condition is detected)
- Enter billing period and credit card info

Once registration is complete, you will receive a confirmation e-mail. You can now plug in your MarCELL.

2 Picking a location for your MarCELL

MarCELL can be plugged into any standard 110V power outlet. **The outlet should be indoors and/or protected from direct contact with the elements (snow, rain, etc.).**

MarCELL will monitor the temperature and humidity levels in the area it is placed. It also checks to make sure that the outlet it is plugged into has power. If it detects a temperature or humidity reading which is outside of the range you set during the unit registration, or the power to the outlet it is plugged into goes out, it will immediately connect to the Sensored Life servers and send out alerts as directed in the notification schedule you setup.

When selecting an outlet, stay away from a location which gets direct sunlight which could also effect the readings taken. In addition, you should also select an outlet which is not located near any sources of heat or cold (large windows, heating/cooling vents, fireplaces, etc.)

Once an outlet is selected, simply plug one end of power supply into MarCELL and other end into outlet.

3 Initial Power Up Sequence

When your MarCELL is plugged into a "live" outlet, you should notice the following activity on the LED status light on the front of the unit.

1) If there is power to the outlet, the status light will immediately come on as a solid yellow for 3-5 seconds during initialization.
2) After initialization the power light should change to a blinking green to signal it has established a connection with the nearest cell tower and is registering with the server.
3) After 20 seconds to 1 minute, the LED power light should turn to a steady green light signaling it has registered with the Sensored Life server and it is ready to begin monitoring the environment & reporting alerts.

If after a minute or two if you do not get a solid green light but instead get some other colors or blinking light pattern, refer to the chart of "LED Light Sequence Meanings" on the following page.

IMPORTANT NOTE: No temperature or humidity alerts will be sent out in the first 30 minutes after your MarCELL is first plugged in as the sensors get used to their new environment & stabilize. Power interruption alerts will, however be sent out during this period.

4 Testing your MarCELL

The simplest way to determine if MarCELL is fully operational, communicating with the Sensored Life server and your alerts are properly set is to perform the following test. This test should only be done once the unit has been registered and the unit is plugged into a live wall outlet and the status light on the MarCELL is on and solid green. To test the unit, simply unplug it from the wall for 30 seconds. This will have the same effect as a power outage. MarCELL will detect that power has been lost. It will then connect to the Sensored Life server and send out a "power outage" message to all the alerts you have previously set-up for Power. Depending on several factors, these alerts may take up to a minute or two to arrive. Then plug your device back into the AC outlet after the test and you will receive a power restored alert.

Changing the Alert Settings and Notifications

You can change the "safe" temperature and humidity ranges at any time and from any where in the world with an internet connected computer or smart phone. Simply go on the Sensored Life website at www.SensoredLife.com, login and select "My Devices". Then select the "Settings" icon. Here you will be able to make changes to the safe ranges as well as add, delete or modify your notification preferences.

Moving or Turning off the unit

You can move MarCELL at anytime should you want to monitor a different room, area or property. For example, to move MarCELL to a new location, you would simply unplug it from its current outlet and then plug it in to a different outlet in the area you would like to monitor. If MarCELL is unplugged for more than 10 seconds, it will transmit a "power lost" signal to our server and notifications will be sent out accordingly.

If you are unplugging MarCELL for a long period of time (such as at the end of the winter season or to re-locate it to a different property), you can turn it off by gently depressing the "off" button located on the back of the unit, above the label. After unplugging the unit and within 8 seconds, use your finger to momentarily depress the button for at least one second. The LED lights on the front of the unit should turn off. If this button is pressed within 8 seconds of unplugging the unit, the "power out" alert will also be eliminated.

Resetting your MarCELL Unit

Your MarCELL unit has been manufactured to provide years of trouble-free operation. On rare occasions if you notice that it has gotten into a strange mode or has stopped reporting, you may reset the device. Use the following procedure: Unplug the unit from the outlet. Gently press and hold (for more than 5 seconds) the "off/reset" button located on the back of the unit, above the label. Use your finger or the eraser of a pencil to gently press and hold the button. The LED lights on the front of the unit should turn off. Plug MarCELL back in to resume normal operation.

LED Light Sequence Meanings

In order to make MarCELL as easy to use as possible, we put everything into one simple package. There are no external probes, complicated displays, antennas, switches or cables to deal with. Three LEDs on the unit indicates the current status of the device. Use the table below to interpret these LED status indicators:

#	Light Sequence	Meaning	Notes / Action
1	Yellow / Status 1	Unit detects power at outlet and is initializing	Normal start up when unit first plugged in
2	Green / Power Blinking (at start up)	Unit connected with cell tower & registered with server	Stage two of start-up sequence
3	Solid Green / Power	Unit is working normally - monitoring environment	Standard general monitoring mode
4	Quick Flashing Green/Power	Unit is reporting data to the server	Upload of hourly data or alert
5	Slow Flashing Green/Power	No power at outlet but unit still monitoring	Running on battery power
6	Solid Red/Status 2	No cellular reception	Try different outlet for better reception
7	Red/Status 2 & Yellow/ Status 1 Alternating Flash	Either Unit not registered but connection with cell tower and server established -or- unit is registered but connection subscription has expired or been cancelled	Go to www.SensoredLife.com and register unit or update connection plan. No alerts will be sent.
8	No light	Either "off" button pressed or unit has been without power and battery has run out	Restore power to outlet to resume monitoring function
9	Alternating Green/Power and Yellow/Status 1 Flash	New Firmware being downloaded to unit or unit is retrying a cellular call.	DO NOT UNPLUG during this process
10	Solid Yellow / Status 1	Unit is in "Do not Call Mode" because cellular subscription is suspended or unit in off-season mode	If suspended, restore your device or renew your subscription online to start receiving notifications

sensored life

For Use In USA Only. Do Not attempt use outside the United States

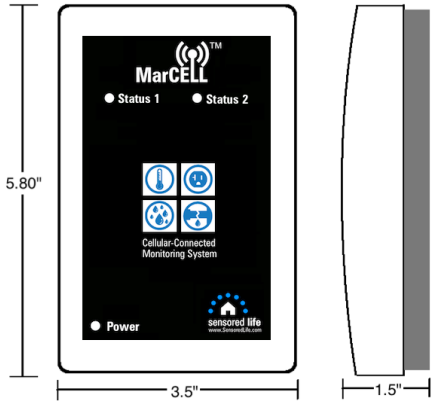

MarCELL	SPECIFICATIONS
Dimensions	5.80" Tall x 4.50" Wide x 1.50" Deep
Model Number:	HS-500SL
Power Input	DC, 5V @ 2A
Battery Type	Internal Li-Ion rechargeable. DO NOT REMOVE. Electronic Recycling of entire unit req'd if battery no longer functioning.
Battery Duration	24-48 Hours Typical when fully charged
Operating Range	Temp: 10 to 120 degrees F. Rel. Humidity: 10 to 95%, non-condensing
Alarm Conditions	Temperature (out of range) Humidity (out of range) Power (change in status)
Notification Types	Email Text Message Phone Call (North America)
Number of Notifications	Up to 9 separate notifications (text, email and/or phone call)
Communication Technology	Cellular - CDMA
Historical Data Recording Frequency	If no alarms, data for temperature, humidity and power is recorded on an hourly basis.
Historical Data Upload Interval	Historical Data (see above) uploaded to web every 8 hours
Wireless External Sensor Communication	915MHz, proprietary protocol, 16 external sensors max (depending on type of sensors)

Doc: 42420120A - Rev A 031715

Copyright 2015 Sensored Life, LLC

MarCELL®

Cellular Connected Temperature Humidity Power Alarm

Quick Start Guide

Model: HS-500SL

Caution: Before registering, plugging in, or using your MarCELL for the first time, please read the important legal and safety information in this guide. Failure to follow these safety instructions could result in fire,electric shock, or other injury or damage to MarCELL or other property.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation

This device contains a Lithium-Ion battery and must be recycled or disposed of properly and in accordance with the national collection and recycling schemes operated by your local or regional authority.

For US Operation Only

Congratulations!

Introducing MarCELL, the simplest, yet most powerful, CELLULAR connected Temperature, Humidity and Power Monitor available today. MarCELL has tons of features designed to protect your property as well as put your mind at ease.

- monitors temperature, humidity and power
- allows remote setting & changing of safe ranges
- instantly alerts you in the event of an issue
- alerts can be via e-mail, text or phone calls
- uses internal cell phone chip to connect to Sensored Life servers
- no phone line or internet required in property being monitored
- has internal, self-charging Lithium-Ion battery to keep on monitoring for days in the event of a power outage
- records hourly data for later viewing on web site
- fully self-contained and ready to work

Write Device ID Here:

__ __ __ __ __ __

LIMITED WARRANTY
Sensored Life LLC, hereby warrants that it will repair or replace, at its option, any part of the MarCELL Temperature, Humidity and Power Alarm (hereafter known as MarCELL), which proves defective by reason of improper workmanship or material, free of charge for parts and labor, for a period of one year from the date of original purchase by the buyer. This warranty does not apply if, in the sole opinion of Sensored Life, MarCELL has been intentionally damaged due to misuse, neglect, improper packing, shipping, modification or servicing by other than Sensored Life, or personnel authorized by Sensored Life. For information on how to obtain service under this warranty contact the dealer where your MarCELL was purchased, or contact Sensored Life via our website at: www.SensoredLife.com.

LIABILITY DISCLAIMER STATEMENT
Sensored Life,LLC (hereafter known as Sensored Life) makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Sensored Life assume any liability arising out of the application or use of any product, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Sensored Life products are not designed, intended, or authorized for use as components in life support systems, or for any other application in which the failure of the Sensored Life product could create a situation where personal injury or death or significant financial loss may occur.

Should any person or persons purchase or use Sensored Life products for any such unintended or unauthorized application, that person or persons shall indemnify and hold Sensored Life, and its officers, employees, affiliates, and distributors harmless against all claims, costs, damages, expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of property damage, personal injury, death or financial loss associated with such unintended or unauthorized use, even if such claim alleges that Sensored Life was negligent regarding the design or manufacture of the product in question.